



AOK 16F SERIES

AUTOMATIC MECHANICAL CONDENSATE DRAIN

16 bar
operating pressure

1/8"
connections

1,5 to 50 °C
operating temperature range


DESCRIPTION

AOK 16F is designed for fully automatic discharging of condensate or any other non aggressive fluid from compressed air system. For any other technical gas please contact producer or your local distributor. AOK 16F is easy to install inside to the filter housing.

AOK 16F can be used in variety of applications. For applications not listed please contact producer or your local distributor.



TECHNICAL DATA	AOK 16F
Operating temp. range	1,5 - 65 °C
Operating pressure	16 bar (232 psi)
Mass	0,05 kg
Connection	ø 14 mm
Outlet connection	G 1/8
Dimensions H x D	85 x ø24 mm
Medium	Condensate (air, water, oil)

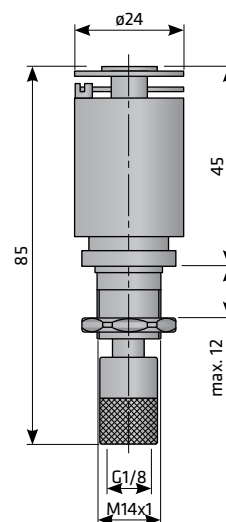

APPLICATIONS

- Air filter

omega air

Air and Gas Treatment



OMEGA AIR d.o.o. Ljubljana

T +386 (0)1 200 68 00
F +386 (0)1 200 68 50

info@omega-air.si

Cesta Dolomitskega odreda 10
SI-1000 Ljubljana, Slovenia
www.omega-air.si

Distribuidor Autorizado:



megafilter
Filtros e sistemas de Filtragem

Rua Silvio Pinto Ribeiro, 1625
Quississana, São José dos Pinhais - PR
CEP: 83085-400

Fone: +55 41 3081 3050
vendas@megafilter.com.br

